Multimedia Projector

LV-7380

you can

Capable, all-purpose projection and effortless ease of use for demanding environments.

The LV-7380 combines the performance of 3000 lumens output with versatile XGA resolution. Easy, eco-friendly operation and up to 5000 hours of lamp life are complimented by a smart, ergonomic design.

XGA RESOLUTION

3000 LUMENS

500:1 CONTRAST RATIO

AUTO VERTICAL KEYSTONE CORRECTION

UP TO 5000 HOUR LAMP LIFE

HDCP-ENABLED DVI TERMINAL

RJ-45 NETWORK PORT

Key Features

- Native XGA resolution for crisp image detail
- 3000 lumens for bright images, even in well-lit environments
- 500:1 contrast ratio for vivid colours
- Canon wide-angle 1.2x zoom lens offers large images from short throw distances
- Auto Vertical Keystone Correction
- Screen Colour Compensation with nine presets
- Built-in audio with powerful 7W output, plus line-out terminal
- Eco-friendly operation: 5000 hour lamp life (in Quiet Mode), less than 1W power consumption in standby
- Low noise: Just 29dBA in Quiet Mode
- HDCP-enabled DVI terminal for sharp reproduction of digital sources
- RJ-45 network port for remote monitoring and control

What's in the Box

LV-7380 Multimedia Projector, Remote Controller, AAA Batteries, AC Mains Power Cable, Computer Connection Cable, DVI-to-VGA Adaptor, Lens Cover, Soft Carrying Case, Warranty Card, Instruction Manual on CD-ROM, Quick Operation Guide, Important Information

Dimensions (W x D x H)

317 x 111 x 336mm

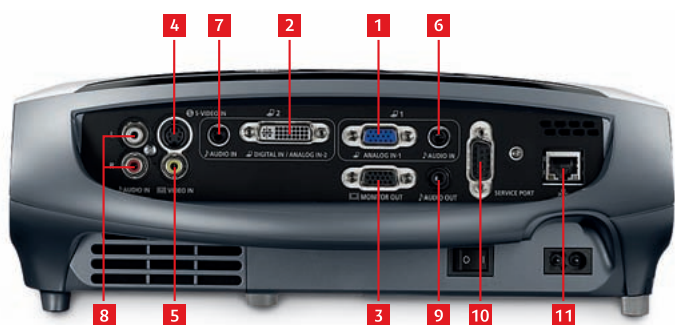### Weight

3.3kg

PROJECTOR

Canon

LV-7380

Specifications

MULTIMEDIA PROJECTOR	
Product Class	Ultra-Portable

LCD PANEL	
Type	Transmissive LCD, Poly-silicon TFT Active Matrix
Size and Number	0.63" diagonal with microlens, 3 panels
Aspect Ratio	4:3
Native Resolution	1024 x 768 (XGA), 786432 pixels

OPTICS	
Lamp Type	180W NSHA
Lens F Number and Focal Length	F1.7 – F2.0; f=19.8 – 23.7mm
Zoom Magnification and Control	1.2x Manual
Focus Control	Manual
Lens Shift	8.44 : 1.56 (fixed)

IMAGE AND AUDIO	
Brightness	3000 lumens
Brightness Uniformity	85%
Contrast Ratio	500:1 (full on / full off)
Projection Distance Coverage	0.8m - 11.3m (3.1m – 3.7m for 100 inch image)
Screen Size	21" - 300" (43 x 32cm - 610 x 457cm)
Digital Zoom Magnification	1x - 4x
Keystone Correction Range	Vertical: +/- 30° (Auto / Manual)
Digital RGB Compatibility	SXGA+ / SXGA / WXGA / XGA / SVGA / VGA / MAC
Analogue RGB Compatibility	UXGA / SXGA+ / SXGA / WXGA / XGA / SVGA / VGA / MAC
Digital Video Scan Systems	1080i / 720p / 576p / 480p
Component Video Scan Systems	1080i / 720p / 576p / 576i / 480p / 480i
Video / S-Video Colour Systems	PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM
Display Modes	Standard, Presentation, Cinema, Video, sRGB
Image Enhancement	Digital Gamma Correction
Built-in Speaker	7.0W RMS, Monaural

CONNECTORS	
Analogue RGB Input 1	Mini D-Sub 15-pin (Component Video via optional cable)
Digital RGB / Analogue RGB Input 2	DVI-I 29-pin, HDCP compatible
Analogue RGB Output	Mini D-Sub 15-pin
S-Video Input	Mini DIN 4-pin
Composite Video Input	RCA x 1
Audio Input 1	3.5mm stereo mini-jack
Audio Input 2	3.5mm stereo mini-jack
Audio Input 3	RCA x 2 (L/R)
Audio Output	3.5mm stereo mini-jack (variable level)
Service Port / Projector Control	Mini D-Sub 9-pin
Network Port	RJ-45

MECHANISMS	
Front Elevation Mechanism	Mechanical foot, 10° maximum image elevation
Rear Adjustment Mechanism	One rotary foot for fine adjustment

RATINGS	
Dimensions (W x H x D)	317mm x 111mm x 336mm
Weight	3.3kg
Power Source	100V - 240V AC, 50/60Hz
Power Consumption	Normal Mode: 239W / Quiet Mode: 196W / Sleep: 10W / Standby: 0.7W
Noise Level	Normal Mode: 35dBA / Quiet Mode: 29dBA
Operating Environment	+5ºC to +40ºC
Storage Environment	-10ºC to +50ºC
Warranty	3 years

All data is based on Canon's standard testing methods. This Leaflet and the specifications of the product have been developed prior to the date of product launch. Specifications are subject to change without notice.
™and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.

Connectivity

1. **Mini D-sub 15-pin:** Analogue RGB Input 1, Component Video
2. **DVI-I 29-pin:** Digital RGB / Digital Video / Analogue RGB Input 2
3. **Mini D-sub 15-pin:** Analogue RGB (Monitor) Output
4. **Mini DIN 4-pin:** S-Video Input
5. **RCA x 1:** Composite Video Input
6. **3.5mm mini-jack:** Stereo Audio Input 1 (for 1)
7. **3.5mm mini-jack:** Stereo Audio Input 2 (for 2)
8. **RCA x 2 (L/R):** Stereo Audio Input 3 (for 4, 5)
9. **3.5mm mini-jack:** Stereo Audio Output (Variable level)
10. **Mini D-Sub 9-pin:** Service Port (RS-232C)
11. **RJ-45:** Network Connection